

PRODUCT CATALOG

YEAR 2025

YOUR **MAT** EXPERT



WWW.YOURMATEXPER.CY

YOUR **MAT** EXPERT

Contents

1. Quick Scrapex
2. Quick Duo
3. Quick Trio
4. Quick Star
5. Quick Alu
6. Quick Dry Alu
7. Quick Dry
8. Quick Mat Tile
9. Boulevard 5000
10. Boulevard Stripe
11. Roclean Logo Mat
12. Roclean Mat
13. Rubber Duckboard Mat
14. Modulflex Removable Tile & Romus Step Tiles
15. Securom Safety Mat
16. Protect-Sol, Chairmats
17. Comfort-Lok & Rampmat
18. High-Duty & High-Duty Grit
19. Solid fatigue Step
20. Fatigue-Step & Fatigue-Step Grit Top
21. Hygimat
22. K-Mat
23. Cobascrape
24. Worksafe
25. Unimat

YOUR **MAT** EXPERT

26. Deckstep
27. Tough Deck
28. Precision Loop Logo Mat
29. Precision NIB Logo Mat
30. Microfibre Door Mat
31. First-Step & Clean- Step
32. Ringmat Honeycomb & Ringmat octomat
33. Higy Well
34. Octoroll & Rampmat
35. Fingertip & Cobascrape
36. Marble Anti - Fatigue
37. Anti Fatigue Tapis
38. Orthomat Office

YOUR **MAT** EXPERT




QUICK SCRAPEX

Outdoor



Outdoor / Indoor



QUICK SCRAPEX



QUICK SCRAPEX is a primary mat for heavy traffic and for both outdoor and indoor use. Made from 100% polyamide brush inserts for heavy scraping on perforated polypropylene dots backing for better water drainage.

Maintenance: Vacuum regularly and for heavy dirt use a high pressure water spray (not steam).


Purpose: Scraping and absorbent mat for outdoor and indoor use.

Location: Schools, office buildings, shops, clinics, banks, etc.

Weight	3.5 kg / m ²
Thickness	13 mm
Sublayer	Latex
Anti-slip coefficient	DS > 0,30



Reference	Material	Colours	Conditioning	Price / m ²
18880	Nylon	Grey	Cut to length	
8880			Per 2m x 20m roll	
18884		Anthracite	Cut to length	
8884			Per 2m x 20m roll	



1 Polyamide scraping insert 2 Perforated collecting zone



The mat is cut in its length L.

To order:

Full roll:

- Dimensions of a full roll: Walking direction (P) 2 m x Length of stripes (L) 20 m.
- Pay attention to the strip direction.

Cut service:


- Can only be ordered by mat length L.
- **The minimum order is 1m in length.** The mat width P (walking direction) is always 2 m.
- Can easily be cut to size on site.

YOUR **MAT** EXPERT

New

Indoor

QUICK DUO



QUICK DUO



QUICK DUO is a primary mat for heavy traffic, made of polypropylene and polyamide spread over 2 inserts separated by collecting zones:


- (1) Polyamide brush scraping insert for coarse dirt.
- (2) Needle punch polypropylene insert which absorbs moisture.

Purpose: Scraping and absorbent mat for indoor use.

Location: Schools, office buildings, shops, clinics, banks, etc.
Class 31 - Moderate commercial use.



Weight	2700 g/m ²
Total thickness	13 mm
Sublayer	3 mm latex
Anti-slip coefficient	DS > 0,30



- 1 Scraping polypropylene loop pile hair
- 2 Polyamide scraping and absorbing insert
- 3 Collecting zone

AREA 2

Reference	Colours	Conditioning	Price /m ²
18861	Anthracite	Cut to length	
8861	Anthracite	Per 2m x 20m roll	

To order:


Full roll:

- Dimensions of a full roll: Walking direction (P) 2 m x Length of stripes (L) 20 m.
- Pay attention to the stripe direction.

Cut service:

- Can only be ordered by mat length L.
- The minimum order is 1m in length. The mat width P (walking direction) is always 2 m.
- Can be easily cut to size on site.

The cut is made over the length L.



YOUR **MAT** EXPERT



QUICK TRIO



Area 2



31



Average
(100 kg)



Efl



3.5 L/m²



ROLL-UP



Roll

QUICK TRIO

+ 3 strips of different nature = higher efficiency




QUICK TRIO is a revolutionary primary mat for heavy traffic, made of 3 polyamide and polypropylene inserts :

- 1 Polyamide brush scraping insert for coarse dirt.
 - 2 Needle punch polypropylene which scrapes finer dirt (sand, etc.).
 - 3 Polyamide insert which absorbs moisture.
- Moderate Commercial Use - Class 31.
Ideally fitted loose in a matwell. Do not fit outside a matwell unless glued in place.

Purpose: Scraping and absorbent mat for indoor use.

Location: Offices, meeting room, etc. Moderate commercial use - Class 31.

Weight	2.75 kg/m ²
Total thickness	13 mm
Sublayer	3 mm latex
Anti-slip coefficient	DS > 0,30

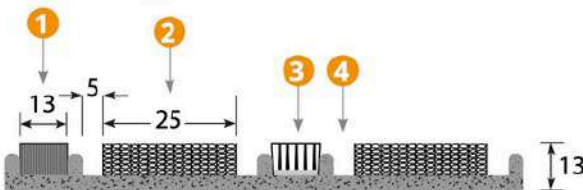


- 1 Polyamide scraping insert
- 2 Polypropylene scraping insert
- 3 Polyamide absorbent insert
- 4 Collecting zone

AREA 2

Reference	Colours	Conditioning	Price /m ²
18870	Anthracite	Cut to length	
8870		Per 2m x 20m roll	
18871	Brown	Cut to length	
8871		Per 2m x 20m roll	

The mat is cut in its length L.



To order:

Full roll:

- Dimensions of a full roll: Walking direction (P) 2 m x Length of stripes (L) 20 m.
- Pay attention to the stripe direction.



Cut service:

- Can only be ordered by mat length L.
- **The minimum order is 1m in length.** The mat width P (walking direction) is always 2 m.
- Can be easily cut to size on site.

YOUR **MAT** EXPERT

Indoor

QUICK STAR

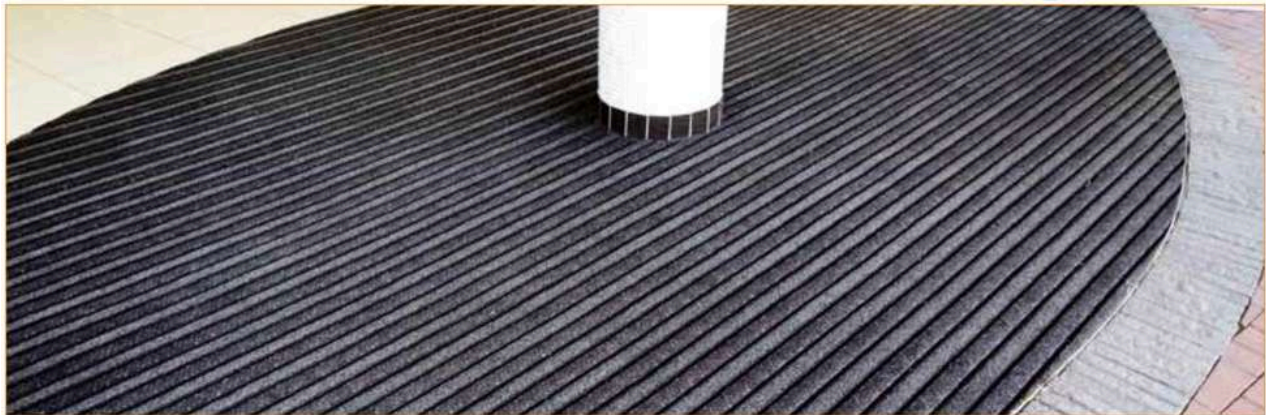

QUICK STAR


+ 2 different polyamide fibres



QUICK STAR is a primary mat for high traffic indoor use. Made of two 100% polyamide inserts, one with scraping fibres, the other with absorbent fibres, and separated by collecting zones. Bi-color design. To coordinate with Scrapex for outdoor.

Function: Scraping / absorbing

Places of use: Schools, office buildings, shops, clinics, banks, etc. Class 33: heavy traffic.

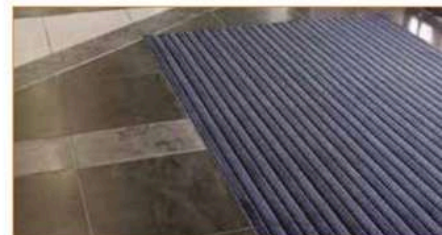

Weight	3.5 kg/m ²
Total thickness	13 mm
Sublayer	Latex
Anti-slip coefficient	DS > 0,30

AREA 2

Reference	Colours	Conditioning	Price /m ²
18815	Black-Grey	Cut to length	
8815		Per 2m x 20m roll	
18816	Grey-Anthracite	Cut to length	
8816		Per 2m x 20m roll	



To order:

Full roll:

- Dimensions of a full roll: Walking direction (P) 2 m x Length of stripes (L) 20 m.
- Pay attention to the strip direction.

Cut service:

- Can only be ordered by mat length L.
- The minimum order is 1m in length. The mat width P (walking direction) is always 2 m.
- Can easily be cut to size on site.

YOUR **MAT** EXPERT



QUICK ALU

Indoor



Area 2



Class 33



Average
(100 kg)



Efl



3.7 L/m²



ROLL-UP



Roll

QUICK ALU



Alu insert entry level




QUICK ALU is an original primary mat for heavy traffic, made of 100% polypropylene fibre strips, combined with aluminium inserts.

Purpose: Scraping and absorbent mat for indoor use.

Location: Schools, office buildings, shops, clinics, banks, etc. Class 33: heavy traffic.

Weight	6 kg / m ²
Thickness	13 mm
Slip resistance	DS > 0,30



1 Aluminium scraping insert

2 Polypropylene scraping insert


3 Collecting zone

AREA 2

Reference	Colours	Conditioning	Price / m ²
18875	Anthracite	Cut to length	
8875		Per 2m x 10m roll	



Stainless steel connecting piece clips
between profiles (see photo 21)



To order:

Full roll:

Dimensions of a full roll: Length of stripes (L) 2 m x Walking Direction (P) 10 m

Cut service:

- Can only be ordered by mat width P (walking direction).

- **The minimum order is 2 m** in length (fixed) x 1 m in walking direction, but beyond that, mats are invoiced to the exact width ordered.

- Can be cut to order on site using an angle grinder for aluminium and carpet knife.

YOUR **MAT** EXPERT

QUICK DRY ALU




QUICK DRY ALU

High End Design + Cfl s1



Video



QUICK DRY ALU is a washable mat for high traffic and indoor use. It is made from 100% polyamide scraping and absorbent inserts and aluminium inserts. Its Cfl-S1 fire classification separates it from the Quick Alu model.

Function & usage: Scraping and absorbent function. Can be laid on the flat or in a channel.

Places of use: Schools, office buildings, shops, clinics, banks, etc. Class 33: heavy traffic.

Material	Polyamide 6.6 & Unfinished aluminium profiles
Backing Latex	3 mm
Thickness	13 mm
Weight	6 kg/m ²
Thickness	13 mm
Fire rating	Cfl-S1
Slip resistance	DS > 0,30
Absorption eau	3,3 L/m ²




1 Aluminium bar

2 Scraping and absorbent polyamide hair

3 Collecting zone



Stainless steel connecting piece clips between profiles (see page 30)



To order:

Full roll: Dimension of full roll: Length 2 m x Depth 10 m. Order by the sq. m.

- Cut to length:

Order only a mat depth of P.

- **The minimum order is 2 m in length L** (always the same) x 1 m Depth, but beyond that the mat is billed at the exact depth ordered.

- Can be cut on site with an angle grinder for aluminium and flooring knife.

Reference	Colours	Packing	Price excl. VAT
8899	Anthracite	In 2m x 10m rolls	
18899		Cut to length	

YOUR **MAT** EXPERT

QUICK DRY



Area 2



Class 33




Average
(100 kg)



Cfl-s1



4,3 L/m²




ROLL-UP



Roll

+ Design and High Traffic Solution + Cfl s1

QUICK DRY

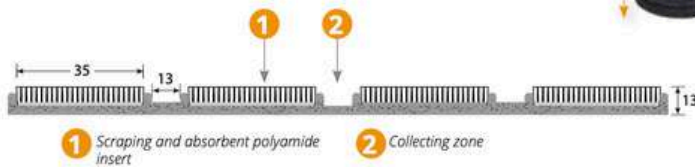

1 Scraping and absorbent polyamide insert

2 Collecting zone

QUICK DRY is a primary mat for heavy traffic and for indoor use, made from 100% polyamide brushing and absorbing inserts. Allows heavy traffic and maximum dirt removal. The fire resistance Cfl-s1 of a stuck down Quick Dry Alu makes it eligible and qualified for all the major projects in public buildings. To coordinate with Scrapex for outdoor.

Purpose : Scraping and absorbent mat for indoor use.


Location : Townhall, Schools, office buildings, shops, clinics, banks, etc.

Class 33	Commercial heavy
Material	Polyamide 6.6
Sublayer	Latex 3 mm
Weight	3.5 kg/m ²
Total thickness	13 mm
Fire rating	Cfl-s1
Non-slip coefficient	DS > 0,30
Absorption eau	4,3 L/m ²

AREA 2

Reference	Colours	Price excl. VAT
8890	Antracite	
18890		

The mat is cut in its length L.



To order:

Full roll:

- Dimensions of a full roll: Walking direction (P) 2 m x Length of stripes (L) 20 m.
- Pay attention to the strip direction.


Cut service:

- Can only be ordered by mat length L.
- **The minimum order is 1m in length.** The mat width (P) (walking direction) is always 2 m.
- Can easily be cut to size on site.

YOUR **MAT** EXPERT

Indoor

QUICKMAT-TILE

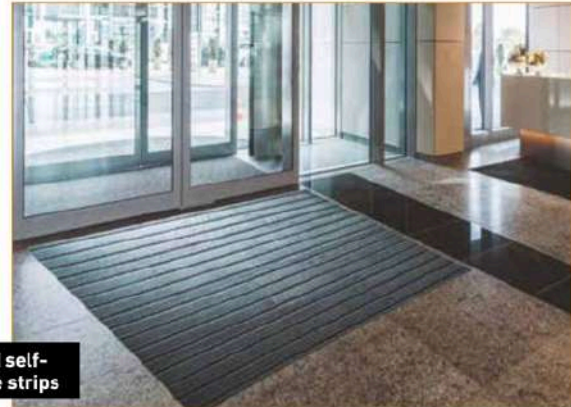

+ tackified self-adhesive strips



Area 2



Class 33



Average (190 kg)



CFI-s1



4.3 L/m²

+ Easy to adjust. With little loss when installation.



Tile

Purpose: Scraping and absorbent mat for indoor use.


Location: Schools, office buildings, shops, clinics, banks, etc. Class 33; heavy traffic.

- ✓ Unique product, easy and quick to install
- ✓ Backing with tackified repositionable adhesive
- ✓ If partially damage matting, simply replace the damaged plank
- ✓ Of the shelf product, with a short lead time



This new and very innovative concept require loose lay installation : The tackified adhesive backing will facilitate the Quickmat Tile installation. On the back of the plank, an arrow indicates the laying direction and, in particular, avoids differences of appearance when laying.

QUICKMAT-TILE 23 X 75 CM

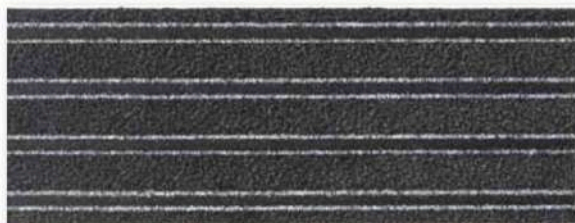

Weight	5.7 kg / m ²
Thickness	+/- 13 mm
Material	Polyamide 6.6
Sublayer	Bitumen
Slip resistance	DS > 0.30

AREA 2


Reference	Colours	Packing	Price / m ²
8550	Anthracite	Kit for 1m ²	



Video



Back tackified adhesive, repositionable.



1 Polyamide scraping and absorbing insert

2 Collecting zone insert

YOUR **MAT** EXPERT

Indoor **BOULEVARD 5000** 



BOULEVARD 5000



Moorhen LRV 2,98

Boulevard 5000 is a secondary entrance matting for heavy traffic for indoor use having moisture retention and soiling elimination properties.


Recommended for settings such as schools, offices, hotels and restaurants. Used along with primary barrier matting or as an entrance matting.

Maintenance:

Vacuum regularly and in case of heavy soiling, clean with a pressure-washer (do not steam clean).

Technical properties:

- Pedestrian traffic: intensive
- Fibre: polyamide (absorbent)
- Carrier: PVC
- Function: absorbs
- Use: indoor
- Can be rolled up
- Attractive and decorative
- Cfl-s1 fire classification

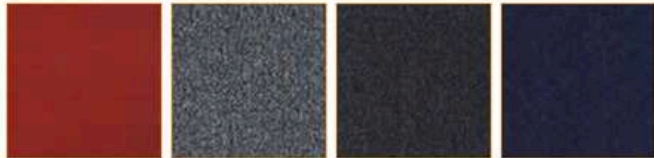

Redpoll LRV 4,14


Cuckoo LRV 5,63

Jackdaw LRV 1,73

Swallow LRV 2,08

Total weight	4,6 kg/m ²
Total thickness	7,5 mm
Material	Polyamide

AREA 2		Reference	Colours	Conditioning	Price /m ²
		565005	Moorhen	Cut to length: Width 2 m x Length 1 m min	
New		565007	Cuckoo		
New		565006	Redpoll		
New		565008	Jackdaw		
New		565009	Swallow		
		565010	Moorhen	Per 2 m x 25 m roll	
New		565011	Redpoll		
New		565012	Cuckoo		
New		565013	Jackdaw		
New		565014	Swallow		



The mat is cut in its length L.

To order:

Full roll:

- Dimensions of a full roll: Walking direction (P) 2 m x Length of stripes (L) 25 m.

Cut service:

- Can only be ordered by mat length L.

- **The minimum order is 1m in length.** The mat width P (walking direction) is always 2 m.

- Can be easily cut to size on site.

YOUR **MAT** EXPERT



BOULEVARD STRIPE

Indoor



BOULEVARD STRIPE



Magpie



Raven

Boulevard Stripe is a secondary entrance matting for heavy traffic for indoor use and having excellent moisture retention and soiling elimination properties. It may be used in some cases

- Either alone as a primary barrier entrance matting
- Or along with another secondary barrier matting such as Boulevard 5000.
- Or along with a technical entrance matting, around the recess.

Recommended for settings such as apartment blocks, office blocks, shops.

Maintenance:

Vacuum regularly and in case of heavy soiling, clean with a pressure-washer (do not steam clean).


Technical properties:

- Pedestrian traffic: intensive.
- Fibres: polyamide (absorbent) mixed with Econyl (scraping)
- PVC carrier
- Function: absorbs and scrapes
- Use: indoor
- Can be rolled up
- Attractive and decorative
- Cfl-s1 fire resistance

Total weight	4,3 kg/m ²
Total thickness	9 mm
Material	Polyamide+Econyl

AREA 2

Reference	Colours	Packing	Price /m ²
560000	Magpie	Per 2 m x 25 m roll	
New 560004	Raven		
560002	Magpie	Cut to length; Width 2 m x Length 1 m min	
New 560006	Raven		



The mat is cut in its length L.

GRADUS



Roll

To order:

Full roll:

- Dimensions of a full roll: Walking direction (W.D) 2 m x Length of stripes (L) 25 m.
- Pay attention to the stripe direction.

Cut service:

- Can only be ordered by mat length L.
- **The minimum order is 1m in length.** The mat width W.D (walking direction) is always 2m.
- Can be easily cut to size on site.

YOUR **MAT** EXPERT

Indoor

ROCLEAN LOGO




HOW TO ORDER A LOGO MAT ?

- 1 - Send us the **sketch of the logo** ideally in a high definition pdf, .ai or .eps file.
- 2 - Specify if the mat is to be installed in a matwell or laid on the floor. For installation in a matwell, order ref. 8851 and add 10 cm to the length and the width of the matwell (see tolerances). The mat will be delivered without edge, with a thicker 3 mm rubber sole (increased stability). The installer will cut the mat to the required size when putting it into the matwell.
- 3 - Specify background colour and mat dimensions.
- 4 - We will send you a model via email within 48 hours for acceptance.
- 5 - The mat will be made to order the mat after approval of the model.

► CONSTRUCTION:

- Professional mats made from :
- Tufted textile made of 6.6 polyamide fibres with coiled form to maximize dust retaining
 - Thick 100% rubber sole with reinforced borders for better resistance to wear and tear and to improve stability.
 - Antistatic
 - High UV resistance
 - Machine washable
 - HD printing

+ Twisted fibre: retains more dust.

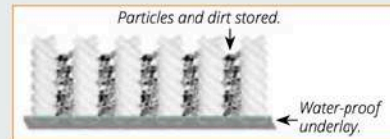

To determine the cost of a custom made mat

- (max. W 2 m x L 6 m)
- Locate the table line corresponding to the width of your carpet
 - **Take the price of the desired width and multiply it by the length of the mat.**
 - Give the **exact dimensions of the mat** (width and length) when ordering
 - You may add extra charge for a sublayer if mat is to be installed in a matwell.

ROCLEAN LOGO



+ price regardless of the number of colours
• free model layout

Weight	2450 g/m ²
Fibre thickness	7 mm
Edge thickness	2,1 mm
Dim. Tolerance	+/- 2 %
Width	edges : 18 mm

AREA 3

STANDARD SIZE

Price per piece

Reference	Dimensions	Price excl. VAT
8821	85 x 150 cm	
8822	115 x 180 cm	

+ short manufacturing lead time

MADE TO MEASURE*

Edges included.

Multiply the price per the length of the mat

Reference	Dimensions	Price excl. VAT
8827	86 à 115 cm	
8828	116 à 150 cm	
8829	151 à 200 cm	

*Dim. Tolerance +/- 5cm
Dim. less than 85 cm, please contact us.



+ Rubber sole
- Optimum retention
- Laundry quality
- 100% recycled and 100% recyclable polyamide

ACCESSORY FOR ROCLEAN/ROCLEAN LOGO

Reference	Designation	Spec.	Price excl. VAT
8851	Extra charge for installing in a matwell	For installing a rubber sole with a 3 mm thickness, which will give the mat better durability and stability in the matwell. The matt will also be delivered without border and with approximately 10 cm extra length and width, to allow re-cutting to properly adapt it to the size of the matwell. To calculate the mat area and the additional area for the matwell frame, add 10 cm to the length and width.	Per m ² .


YOUR **MAT** EXPERT



ROCLEAN

Indoor

+ Heavy traffic

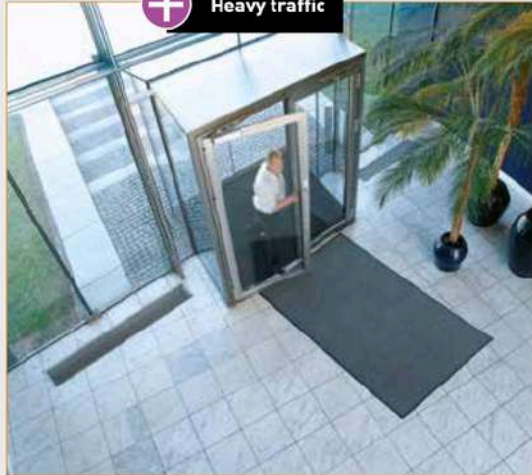

► CONSTRUCTION:

- Professional mats made from :
- Tufted textile made of two-coloured 6 polyamide fibres with coiled form to maximize dust retaining
 - Thick 100% rubber sole with reinforced borders for better resistance to wear and tear and to improve stability.
 - Antistatic • High UV resistance.
 - Machine washable.. Indoor.

+ Twisted fibre: retains more dust.



Clf-s1



4 → 6L/m²




Intensive



Steel Grey

Mink



ROCLEAN



+ Rubber soleplate
- twisted fibres, better retention
- Laundry quality

Weight	2260 g/m ²
Fibre thickness	7 mm
Edge thickness	2,1 mm
Dim. Tolerance	+/- 2 %
Width	edges : 18 mm

STANDARD SIZES

In stock. Price per piece

Reference	Dimensions	Colours	Price excl. VAT
8840	85 x 150 cm	Steel grey	
8841		Mink	
8845	115 x 180 cm	Steel grey	
8846		Mink	

MADE TO MEASURE*

Edges included.
Multiply the price per the length of the mat

Reference	Dimensions	Colours	Price excl. VAT
8837	85 to 115 cm	Steel grey	
8834		Mink	
8838	116 to 150 cm	Steel grey	
8833		Mink	
8839	151 to 200 cm	Steel grey	
8832		Mink	

*Dim. Tolerance +/- 5cm
Dim. less than 85 cm, please contact us.


- To determine the cost of a custom made mat** (max. W 2 m x L 6 m)
- Locate the table line corresponding to the width of your mat
 - **Take the price of the desired colour and multiply it by the depth of the mat.**
 - **Give the exact dimensions of the mat** (width and length) when ordering
 - **You may add extra sublayer** in case mat is to be installed in a matwell.

ACCESSORY FOR ROCLEAN/ROCLEAN LOGO

Reference	Designation	Spec.	Price excl. VAT
8851	Extra charge for installing in a matwell	For installing a rubber sole with a 3 mm thickness, which will give the mat better durability and stability in the matwell. The matt will also be delivered without border and with approximately 10 cm extra length and width, to allow re-cutting to properly adapt it to the size of the matwell. To calculate the mat area and the additional area for the matwell frame, add 10 cm to the length and width.	

YOUR **MAT** EXPERT

Outdoor **RUBBER DUCKBOARD** Indoor

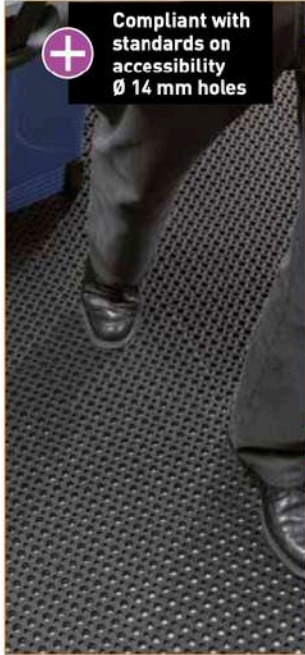

Compliant with standards on accessibility
Ø 14 mm holes

RECESS



AREA 1 AREA 2

FREE-STANDING



COMPLIANT WITH ACCESSIBILITY STANDARDS - TH. 12.5 MM

Small holes of Ø 14 mm, in compliance with standards on public entrances. Surface specially designed for trolleys, wheelchairs, crutches, white canes...

Straight edges

Reference	Dimensions	Price excl. VAT
8760	Tile 1.50 m x 1 m	

ACCESSORY FOR DUCKBOARD IN COMPLIANCE WITH STANDARDS TH. 12.5 MM REF. 8760

Reference	Designation	Price excl. VAT
8761	Connector (10 pcs)	

Bevelled edges

Reference	Dimensions	Price excl. VAT
8762	Tile 1.50 m x 0.90 m	

Outdoor **CLASSIC RUBBER DUCKBOARD** Indoor



RECESS



AREA 1 AREA 2

RECESS



AREA 1 AREA 2



Hard-wearing

COMPACT - TH. 23 MM

Weight : 13.3 kg/m², Ø 28 mm holes. Suitable for heavy traffic.

Reference	Dimensions	Price excl. VAT
8755	Tile 1.50 m x 1 m	

ACCESSORY FOR COMPACT GRATING TH. 23 MM



Reference	Designation	Price excl. VAT
8756	Connector (10 pcs)	



Low budget

FIRST - TH. 22 MM

Weight: 9.7 kg/m², Ø 28 mm holes. Low budget.

Reference	Dimensions	Price excl. VAT
8758	Tile 1.50 m x 1 m	

Thickness 23 mm - classic

YOUR **MAT** EXPERT

Indoor **«MODUFLEX» REMOVABLE TILES** Outdoor 



► CONSTRUCTION:

Revolutionary entrance matting system of interlocking, multi-zone tiles, that can be easily installed for a smooth transition between indoors and outdoors. The drainage holes are compliant with the standard on accessibility to Public and Administration Facilities and their smooth surface is suitable for wheels (trolleys, wheelchairs, suitcases, etc.). These tiles can be combined and installed:- indoors as a free-standing floor covering- indoors in a matwell- outdoors (only the OPEN model without carpet)

+ Interlocking tiles

+ Easy cut



+ Conforms to the accessibility standard

OPEN MODUFLEX TILES 12 MM



These mat tiles scrape shoes to prevent dirt, sand or filth from entering the buildings.


- Inside or outside
- Very heavy traffic areas.
- Open bottom duckboard with octagonal holes of Ø 14 mm.



AREA 1	Reference	Material	Dimensions	Thickness	Structure	Price excl. VAT
AREA 2	8795	Black rubber	50 x 50 cm	12 mm	Open	



Indoor **ROMUSTEP TILES** 

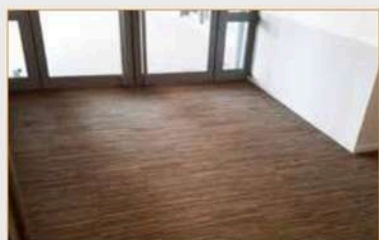

► CONSTRUCTION:

«ROMUSTEP» is made from the radial structure of recycled lorry, bus and aircraft tyres. This consists of rubber reinforced by nylon fibres, surface-scraped to show a synthetic down. «ROMUSTEP» underneath is a glass fibre canvas layer, which helps it stick perfectly when glued. Weight: 9 kg/m².

► MAINTENANCE:

In heavy traffic areas, «ROMUSTEP» must be cleaned daily with a vacuum cleaner or hard brush. It may also be shampoo-cleaned by injection/extraction process.



PURPOSE: SCRAPES/ABSORBS (moisture from shoes)
LOCATION: INDOORSANTI-SLIP / ROT -PROOF

+ Green product recycled rubber


+ Tiles to be glued quick and easy solution

ROMUSTEP TILES



AREA 2	Reference	Dimensions	Thickness	Price per tile
	8200	Tile 30.5 x 30.5 cm	10 mm	

+ 11 tiles / m²

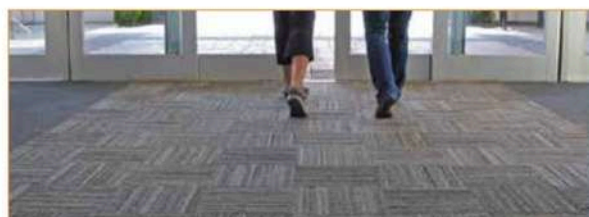

YOUR **MAT** EXPERT



SAFETY MAT

Outdoor


«SECUROM» SAFETY MAT

Indoor and outdoor anti-slip safety mat, for high traffic. Prevent risk of slippery frozen or wet ground surfaces. Is placed mainly in shopping areas, on footbridges, hotel passageways, balconies and terraces.

To be placed on the ground, dry and clean when it is placed. May also be placed on uneven ground (mud, earth or sand) to create an access path that is "carriageable and non-slip" for individuals in wheelchairs, disabled people, or on work sites to move around with wheelbarrows...

Technical properties:

- Polyester and glass fabric blend with PVC foam coating
- Granulated PVC surface
- Resistance to temperature -25° to +60°C
- Fire resistance Bfl-s1
- Anti-slip resistance R13
- Draining and rot-proof properties V10
- Anti-fatigue
- Easily cleanable with water spray
- Thickness: 6-7 mm
- Weight: 2.3 kg/m²



To order:

- **Full roll:** Dimension of full roll: Width 1.20 m x Length 10 m.
- **Cut to length:** A mat length L of 2 m minimum is ordered (in multiples of 1 m) and max. 7 m. The depth will always be 1.20 m.

Free standing or in a recess, loose-lay from 3 m x 1.20 m. Stop profiles must be placed at the start and end of the rolled out Safety Mat in order to protect the ends.



- Non-slip
- Draining
- Loose-lay


Hotel passageways, balconies, terraces, etc.

Making pedestrian areas safer, demarcation of walkways in construction sites, etc.

Wooden footbridges, commercial areas, pontoons, etc.

«SECUROM» STEP

See page 86

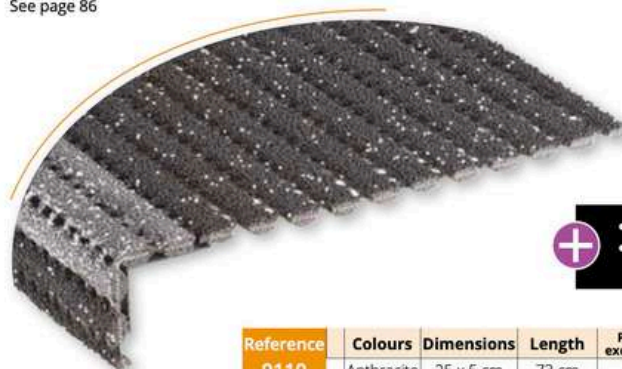

- Non-slip
- Almost covers the step



Reference	Colours	Dimensions	Length	Price excl. VAT
9110	Anthracite	25 x 5 cm	73 cm	

YOUR **MAT** EXPERT

«PROTEC'SOL» CHAIR MATS




- Polycarbonate
- 5-year guarantee
- Does not turn yellow

► CONSTRUCTION:

To protect floors from wear and tear caused by office chairs and armchairs. Made in Polycarbonate, robust, yellowing and UV resistant. Containing no PVC, 100% recyclable, suitable for heated floors. Anti-slip, perfect grip on flooring. Thickness : 1.7 mm for smooth chair mats, 2 mm for spiked mats.


Rectangular shape with rounded corners

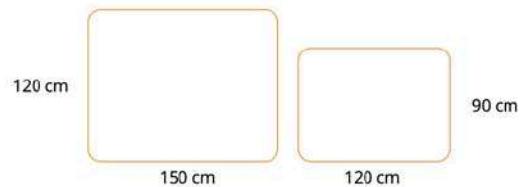


SMOOTH CHAIR MATS



On hard floor

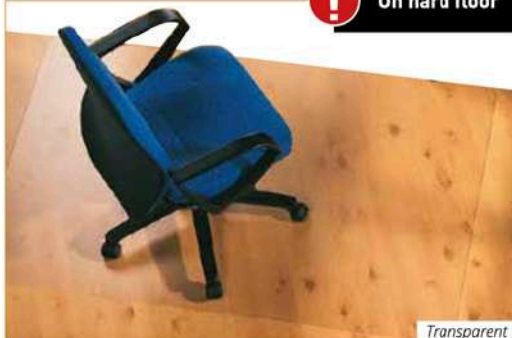

Transparent

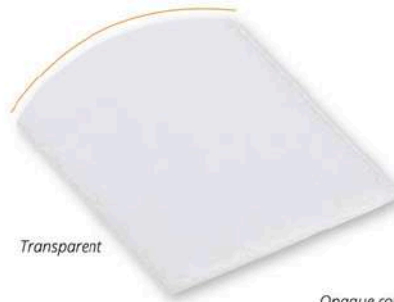


Transparent



For parquet, laminate flooring, PVC, linoleum...

Opaque colour to mask the imperfections or wear of the floor.
Smooth side should be facing floor




Reference	Colours	Dimensions	Price excl. VAT
94800	Transparent	90 x 120 cm	
94802		120 x 150 cm	

SPIKED CHAIR MATS



For textile flooring

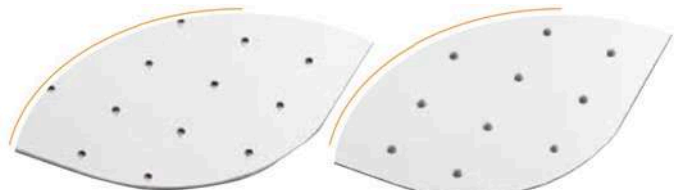

For textile flooring
Spikes should be facing textile flooring



Reference	Colours	Dimensions	Price excl. VAT
94810	Transparent	90 x 120 cm	

YOUR **MAT** EXPERT

COMFORT-LOK

Fatigue relief for standing workers on production lines or benches

- Heavy-duty rubber mats provide a comfortable standing surface for operatives.
- Available as interlocking modules for long runs, or as a single workstation mat.
- Resistant to oil and grease making it ideal for food production areas or in any catering business.
- Diamond patterned surface provides underfoot grip.
- Hardwearing rubber ensures a long life in normal use.
- Suitable for high temperature environments.
- Slip tested to DIN 51130.
- Product height: 12 mm

SIZE	PART DESCRIPTION	BLACK
0.7 m x 0.8 m	(interlocking end piece)	CL010001
0.7 m x 0.8 m	(interlocking middle piece)	CL010002
0.7 m x 0.8 m	(edged all round)	CL010004



Typical Applications
General Industrial

Material
Natural rubber/25% NBR blend

Resistance to Environment
Suitable for wet and dry indoor environments



RAMPMAT

Banish cold hard concrete floors with our entry level rubber anti-fatigue mat



- Provide standing relief to all workers with this economical anti-fatigue mat.
- Raised circular surface provides effective slip resistance.
- Open drainage holes capture spilt liquids, swarf or other debris to help prevent slips.
- Moulded ramped edges to reduce the risk of trips and allow wheeled access.
- Made from hardwearing rubber for durability.
- Slip tested to DIN 51130.
- Product height: 14 mm

SIZE	BLACK
0.8 m x 1.2 m	RP010002
0.9 m x 1.5 m	RP010001



Typical Applications
General Industrial, Areas where swarf is prevalent.

Material
Rubber mix, including >50% recycled material



For all environments

YOUR **MAT** EXPERT

HIGH-DUTY

Reduce standing fatigue at larger or oily workstations

- A very comfortable alternative to cold hard floors.
- Open holes capture spilled liquids and swarf.
- Manufactured from a blend of rubber for better than average resistance to oil and chemicals.
- Available in standard mats, edged on all sides, or as interlocking modules for larger areas.
- Raised circular surface gives excellent underfoot grip.
- Slip tested to DIN 51130.
- Product height: 12 mm

SIZE	PART DESCRIPTION	BLACK
0.9 m x 1.5 m	Edged on all sides	HI010001
0.9 m x 1.5 m	Connectors on one short side	HI010002
0.9 m x 1.5 m	Connectors on both short sides	HI010003
0.9 m x 1.5 m	Connectors on one long side	HI010004
0.9 m x 1.5 m	Connectors on both long sides	HI010005






Typical Applications
General industrial, Bars, Catering environments, Machine tool areas where swarf is prevalent

Material
Natural rubber/25% NBR compound

Resistance to Environment
Suitable for wet and dry environments

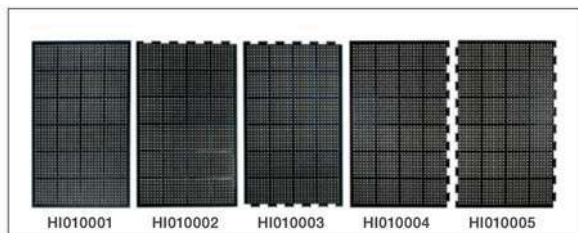


HIGH-DUTY GRIT


Reduce slips and standing fatigue in one

- Provides both slip-resistance and fatigue-relief.
- 'Grit' coating and raised surface pattern combine for highly effective slip resistance.
- Material composition means it is highly resistant to chemicals, oils and grease.
- Provides fatigue-relief from cold hard floors.
- Ideal for demanding locations such as engineering workshops.
- Moulded bevelled edges reduce trip hazards.
- Open drainage holes for spilled liquids.
- Slip tested to DIN 51130.
- Product height: 13 mm

SIZE	BLACK
0.9 m x 1.5 m	HI010001G



YOUR **MAT** EXPERT

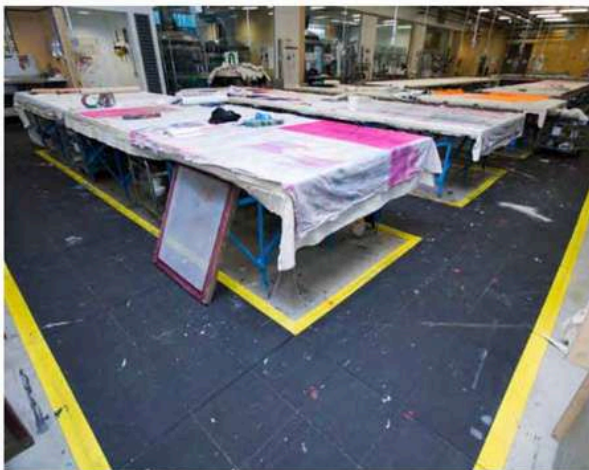


SOLID FATIGUE-STEP

Modular anti-fatigue matting for larger areas

- Tiles link together to provide a very comfortable anti-fatigue surface.
- Can withstand temperatures of up to 160°C and spillage of molten glass.
- Individual tiles can be moved and replaced with ease.
- Fully slip tested – see datasheet for details.
- Main tiles available in two options: Standard or Nitrile / B1
- Nitrile option has excellent resistance to oils, chemicals and grease.
- B1 version tested to BS EN 13501 – see datasheet for details.
- Optional ramped edging in yellow or black.
- Product height: 18 mm

SIZE	BLACK	B1 NITRILE
0.9 m x 0.9 m	ST010001	ST010001B1

EDGING	PART DESCRIPTION	BLACK	YELLOW
Fatigue-Step Edges B1	Female Corner Edge B1	SS010002B1F	SS070002B1F
Fatigue-Step Edges B1	Male Corner Edge B1	SS010002B1M	SS070002B1M
Fatigue-Step Edges Nitrile	Female Corner Edge Nitrile	SS010002FN	SS070002FN
Fatigue-Step Edges Nitrile	Male Corner Edge Nitrile	SS010002MN	SS070002MN
Fatigue-Step Edges	Female Corner Edge	SS010002F	SS070002F
Fatigue-Step Edges	Male Corner Edge	SS010002M	SS070002M



Typical Applications
General Industrial

Material
Standard - Natural rubber with 25% NBR. Nitrile version - 100% NBR.

Resistance to Chemicals
Standard version offers limited resistance to chemicals and oils. Nitrile version offers excellent resistance to oils and chemicals.



INSTALLATION
GUIDE AVAILABLE



YOUR **MAT** EXPERT

FATIGUE-STEP

Fatigue relief for large, wet and oily shop floors

- Tiles link together to provide an anti-fatigue surface for particularly wet or oily areas.
- Soft, yet resilient rubber floor tiles.
- Open holes allow efficient drainage of spilt liquids.
- Effective anti-fatigue properties for prolonged standing.
- Main tiles available in two options: Standard or Nitrile
- Nitrile option has excellent resistance to oils, chemicals and grease.
- Slip tested to DIN 51130.
- Optional ramped edging in yellow or black.
- Product height: 18 mm


SIZE	BLACK	NITRILE
0.9 m x 0.9 m	SS010001	SS010007




Typical Applications
All industrial environments, Bars, Catering environments, Areas where swarf is prevalent.

Material
Rubber mix, including >50% recycled material

Resistance to Chemicals
Natural rubber offers limited resistance to chemicals and oils




PLEASE SEE PAGE 32 FOR EDGING OPTIONS





FATIGUE-STEP GRIT TOP

Fatigue relief with superior slip resistance

- 'Grit' top surface provides exceptional grip even in oily conditions.
- Extremely robust interlocking tiles for heavy-duty use.
- Open holes allow efficient drainage of spilt liquids.
- Provides high levels of comfort underfoot to relieve fatigue.
- Made from nitrile for excellent resistance to oils and chemicals.
- Slip tested to DIN 51130.
- Optional ramped edging in yellow or black.
- Product height: 18 mm

SIZE	BLACK
0.9 m x 0.9 m	SS010001G






Typical Applications
General industrial

Material
Rubber mix, including >50% recycled material

Resistance to Chemicals
NBR offers excellent resistance to oils and chemicals



PLEASE SEE PAGE 32 FOR EDGING OPTIONS



YOUR **MAT** EXPERT




HYGIMAT

A revolutionary hygienic anti-fatigue mat

- Improve feeling of comfort and energy whilst standing at work.
- Ideal for any workplace where hygiene is important e.g. healthcare, food manufacturing, catering, hospitality, clean rooms or food retail.
- Made from a revolutionary 'gel foam' material that combines the best in durability and comfort.
- Material also has anti-microbial properties
- Closed cell construction means that no liquids can penetrate the mat and reduce performance.
- Version with holes is ideal for wet workplaces in need of drainage.
- Oil resistant.
- Easily cleaned – can be cleaned with detergent or can be steam sterilised.
- Fire tested to BS EN 13501-1 and slip tested to DIN 51130.
- Product height: 17 mm ±1 mm

SIZE	(WITH HOLES)	(SOLID SURFACE)
0.6 m x 0.9 m	HYG010001	HYS010001
0.9 m x 1.5 m	HYG010002	HYS010002
0.9 m x 1.8 m	HYG010003	HYS010003



Typical Applications
Hospitals, Clean rooms, Offices, Catering environments

Material
Rubberised Gel Foam

Resistance to Chemicals
Generally resistant to chemicals.


Version with holes is ideal for wet workplaces in need of drainage.



YOUR **MAT** EXPERT



Reduce fatigue and slips on greasy floors

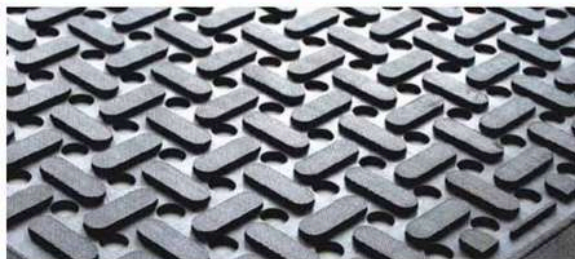

K-MAT

Reduce fatigue and slips in oil prone areas


- A nitrile rubber mat for swarf prone areas.
- Contains nitrile to offer the best resistance to oils and chemicals.
- Ideal for food processing and manufacturing locations due to its excellent resistance to grease, fats and detergents.
- Easily cleaned in a commercial washing machine.
- Raised pattern surface for exceptional slip-resistance (tested to DIN 51130).
- Open holes efficiently drain liquids and capture debris.
- Hygienic anti-microbial properties make it suitable for food processing locations.
- Product height: 9 mm

SIZE

0.92 m x 1.53 m
0.92 m x 2.9 m

BLACK

KM010001
KM010002



Typical Applications

Food manufacturing, Kitchens, General industrial, Machine tool areas where swarf is prevalent

Material

NBR

Resistance to Chemicals

Resistant to oil

YOUR **MAT** EXPERT




COBASCRAPe

A durable anti-slip mat ideal for areas prone to oil or chemical spillage

- A solid surface mat designed to reduce slips in oily or greasy conditions.
- Raised surface pattern provides extra underfoot grip.
- Recessed pattern creates drainage channels to capture liquids.
- Makes standing more comfortable in a wide range of workplace environments.
- Resilient to degradation in oily, greasy and chemical prone areas for a longer lifespan.
- Single mat design makes it a quick and simple solution to reducing slip accidents.
- Bevelled edges as standard to reduce trip hazards.
- Slip tested to DIN 51130.
- Product height: 6 mm

SIZE	BLACK
0.85 m x 0.75 m	CS010001
0.85 m x 1.5 m	CS010002
0.85 m x 3 m	CS010003
1.15 m x 1.75 m	CS010004



Typical Applications
Food manufacturing, Kitchens, General industrial. Entrance areas.

Material
NBR

Resistance to Chemicals
Resistant to many chemicals, alkalis, detergents, oils, machine coolants and general industrial coolants. Rubber may swell in polar solvents.



YOUR **MAT** EXPERT



WORKSAFE

If greasy floors are a problem, this is your ideal anti-slip mat!

- Improves comfort during prolonged standing.
- Hardwearing making it suitable for many industrial environments – a choice of two materials.
- Blue oil-resistant option is ideal for greasy, oily workstations where slips pose a threat.
- Open holes capture spilt liquids and swarf.
- Effectively reduces slip hazards where spillage is prevalent.
- A complete mat that can be used as immediate safety solution.
- Bevelled edging all round for trip protection.
- Slip tested to DIN 51130.
- Product height: 12 mm

SIZE	BLACK	BLUE
0.9 m x 1.5 m	SW010001	SW020001



Typical Applications
Welding bays, Machine tool areas where swarf is prevalent

Material
Rubber mix, including >50% recycled material.


Resistance to Chemicals
Natural rubber is resistant to water and most mild acids

Worksafe blue is ideal for the food industry.

Dirt, spores, mould, food and detergent residues are more clearly visible on blue mats.

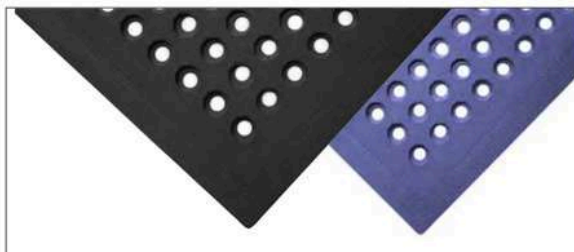

YOUR **MAT** EXPERT

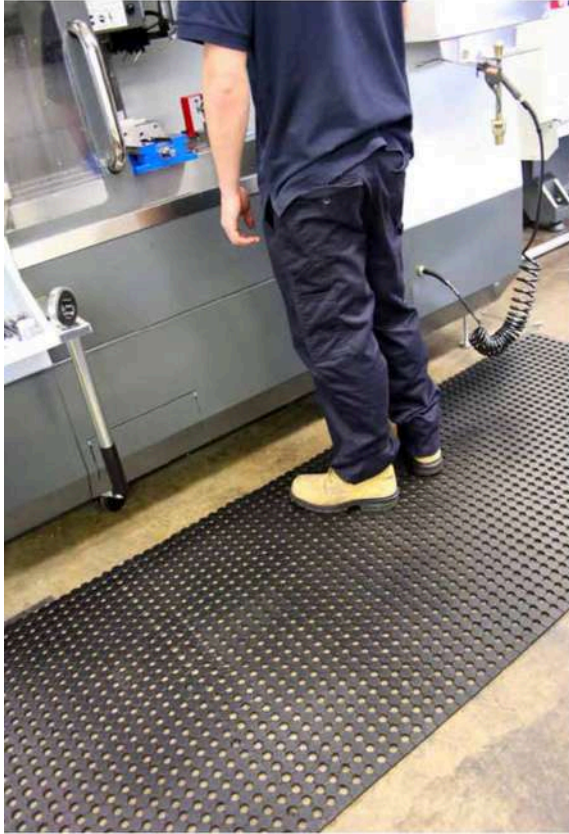

UNIMAT

Heavy-duty anti-fatigue matting for wet areas

- Versatile rubber runner. • Open holes provide excellent drainage. • A real asset in helping to prevent slipping in wet areas. • Easy to roll up and move to new locations or for cleaning. • Slip tested to DIN 51130. • Product height: 10 mm

SIZE

1 m x 5 m
1 m x 10 m
1 m x per linear metre

BLACK

UM010001
UM010002
UM010002C



Typical Applications
General industrial, Bars,
Catering environments

Material
Rubber mix, including >50%
recycled material.

Resistance to Chemicals
Resistant to water and
most mild acids

YOUR **MAT** EXPERT










Typical Applications
 General industrial, Production lines,
 Assembly areas, Packing stations,
 Workbenches. Swimming pools,
 Changing rooms, Showers, Gyms.

Material
 PVC

Resistance to Chemicals
 Resistant to acid and alkali


DECKSTEP

Multi-purpose ribbed vinyl matting for industry

- Raise workers off the ground like traditional duckboard.
- Reduce the risk of slips by removing feet from direct contact with spilt liquids.
- Provides a much more comfortable standing surface than concrete.
- Textured surface provides slip resistance.
- Flexible and lightweight – easy to move and clean.
- Strips are welded together for strength.
- Slip tested to DIN 51130.
- Product height: 11.5 mm ±0.5 mm




SCAN ME



SIZE	BLACK	BLUE	GREEN	GREY	RED
0.59 m x 10 m	DS010610	DS020610	DS040610	DS060610	DS030610
0.59 m x per linear metre	DS010610C	DS020610C	DS040610C	DS060610C	DS030610C
1.0 m x 10 m	DS011010	DS021010	DS041010	DS061010	DS031010
1.0 m x per linear metre	DS011010C	DS021010C	DS041010C	DS061010C	DS031010C
1.2 m x 10 m	DS011210	DS021210	DS041210	DS061210	DS031210
1.2 m x per linear metre	DS011210C	DS021210C	DS041210C	DS061210C	DS031210C

YOUR **MAT** EXPERT


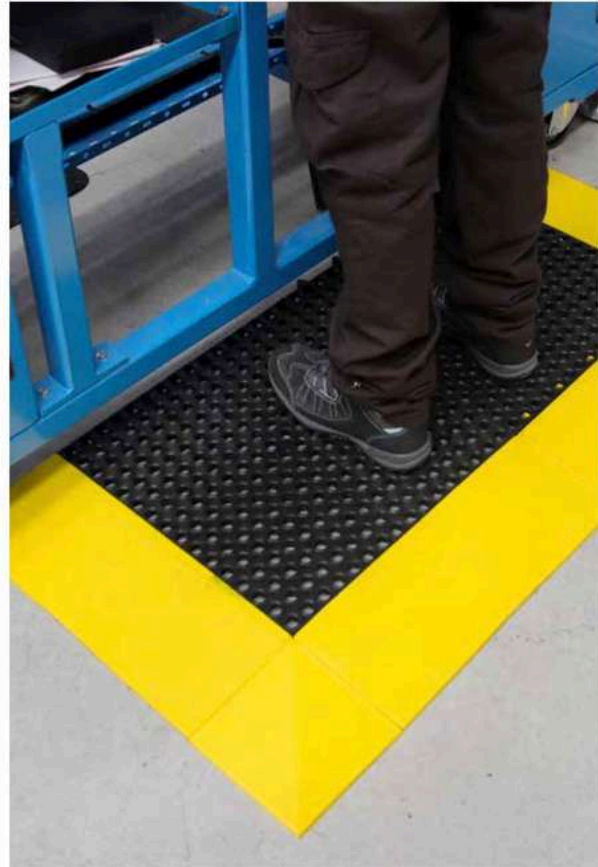


TOUGH DECK


Recycled drainable workplace tiles

- Non-slip interlocking decking for wet areas.
- Combination of substantial product height and large holes offers excellent drainage.
- An economical yet heavy-duty matting solution.
- Easy DIY installation with connectors that conceal joins.
- Ideal for industrial use, especially in areas prone to liquid spillage.
- Ramped edges to prevent trips are available in black or yellow.
- Provides entry level anti-fatigue properties.
- Slip tested to DIN 51130.
- Product height: 20 mm

SIZE	BLACK		
0.48 m x 0.48 m	TDT010001		
	EDGING	BLACK	YELLOW
(Pack of 4)	Corner Edge	TDC010001	TDC070001C
0.48 m x 0.18 m	Female Ramped Edge	TDE010001F	TDE070001F
0.48 m x 0.18 m	Male Ramped Edge	TDE010001M	TDE070001M




YOUR **MAT** EXPERT

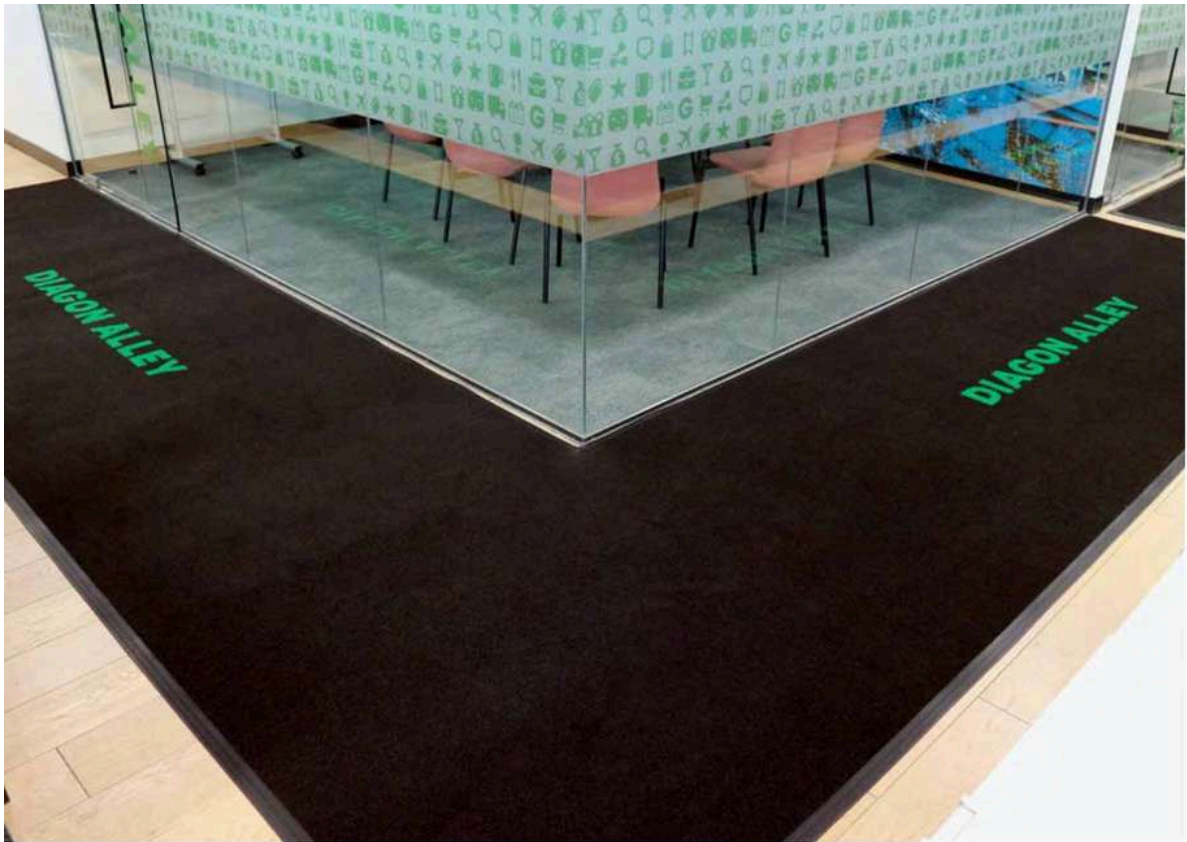

PRECISION LOOP

Popular inlay logomats

- Perfect material to produce inlay logomats with a smooth surface.
- Durable entrance carpet, UV and stain resistant. • Ideal for use in logomat designs • Choose from 15 colours to recreate your design.
- Heavy weight pile provides outstanding absorbing and wiping action. • Needlefelt construction provides good crush resistance.
- Edges will not unravel or fray. • Logomats made in Britain. • Low installation cost. • Product height: 12.5 mm +15% / -10%



Resistance to Environment
Suitable for indoor environments only

Material
PP

					
SIZE	BLACK	SKY BLUE	RED	DARK GREEN	DARK BROWN
2 m x 23 m	PL010001	PL020001	PL030001	PL040001	PL050001
					
SIZE	LIGHT GREY	YELLOW	WHITE	CHARCOAL	DARK GREY
2 m x 23 m	PL060001	PL070001	PL100001	PL110001	PL160001
					
SIZE	ORANGE	BLUE	LIGHT BROWN	WINE RED	APPLE GREEN
2 m x 23 m	PL170001	PL180001	PL190001	PL320001	PL420001


YOUR **MAT** EXPERT



PRECISION NIB

High quality print logo mats in your design

- High quality rugged matting material available in stunning colourways.
- Hardwearing, UV and stain resistant.
- Ideal for use in logomat designs – choose from the 18 colours to recreate your design.
- Heavy weight pile and large nib design provides outstanding scrubbing action.
- Needle-punch construction provides optimal crush resistance.
- Edges will not unravel or fray.
- Logomats made in Britain.
- Low installation cost.
- Product height: 11 mm +15% / -10%



3


1

Resistance to Environment
Suitable for indoor environments only

Material
PP

SIZE	BLACK	CHARCOAL	LIGHT GREY	DARK BROWN	GOLDEN BEIGE	LIGHT BEIGE
2 m x 23 m	SC010001	SC110001	SC060001	SC050001	SC220001	SC210001
SIZE	NAVY BLUE	SKY BLUE	BABY BLUE	WINE RED	RED	PINK
2 m x 23 m	SC180001	SC020001	SC430001	SC320001	SC310001	SC260001
SIZE	PURPLE	ORANGE	YELLOW	WHITE	DARK GREEN	APPLE GREEN
2 m x 23 m	SC200007	SC170001	SC070001	SC130001	SC040001	SC420001

YOUR **MAT** EXPERT

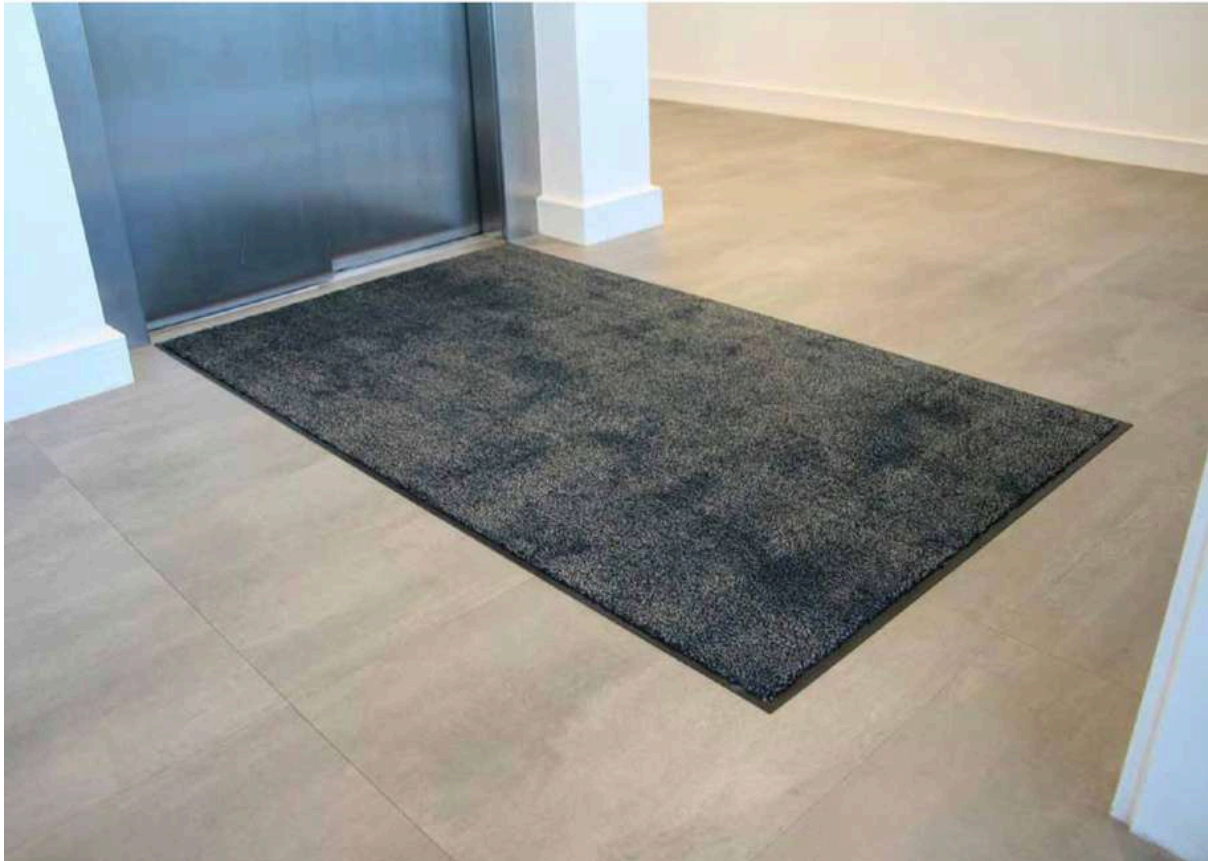

MICROFIBRE DOORMAT

Washable doormat with super absorbency and microfibre technology

- Multi-action entrance mat with hygienic microfibre technology.
- Flexible, ultra-fine fibres (finer than a human hair) provide deep-cleaning action on passing footwear.
- Friction from the fibres generates a static charge that attracts and traps dust/debris.
- Effectively penetrates those hard to reach treads on footwear and wheeled trolleys.
- Superior 'brushing and wiping' with 'rapid dry' properties that outperform cotton.
- Luxuriously soft pile that keeps entrances looking smart, stylish and free from lint.
- Environmentally-friendly – does not require chemical pre-treatment or washing detergents.
- Product height: 8 mm



SIZE	BLACK	BEIGE
0.6 m x 0.9 m	MF010001	MF210001
0.9 m x 1.5 m	MF010002	MF210002



Material
Microfibre

Resistance to Environment
Suitable for wet and dry indoor environments

YOUR **MAT** EXPERT

FIRST-STEP

The first step to contamination control

- A hygienic pad of peel-off, disposable sheets, manufactured from an anti-microbial agent to protect against bacteria, mould and mildew.
- The 'tacky' sheets capture dirt and dust from footwear and wheeled equipment for contamination control.
- When the top sheet becomes soiled, simply peel off to reveal a clean layer.
- Comes with self-adhesive backing to keep the mat in place.
- Ideal for hospitals, clean rooms, general industrial environments, and any other area where hygiene is an important factor.
- Product height: 1.5 mm

SIZE	WHITE	BLUE
0.45 m x 1.17 m	WC000004	WC020004

Typical Applications


Entrance areas, Clean rooms, Hospitals

Material

PE with water based acrylic adhesive.

Resistance to Environment

Suitable for indoor environments only



CLEAN-STEP

Dirt control with a difference

- A pad of 'tacky' sheets, with adhesive coating that effectively attracts and contains walked-in dirt and dust for floor cleanliness.
- Once soiled, each sheet is peeled off and disposed of to reveal a clean sheet.
- Ideal for clean rooms, hospitals, general industrial environments, and any area where cleanliness and hygiene is important.
- Fixed to a sturdy rigid backing to keep it in place. Also assists in easy relocation.
- Refill pads containing 60 layers are also available.
- Product height: 6.5 mm

Typical Applications


Entrance areas, Clean rooms, Hospitals

Material

PE with water based acrylic adhesive.

Resistance to Environment

Suitable for indoor environments only

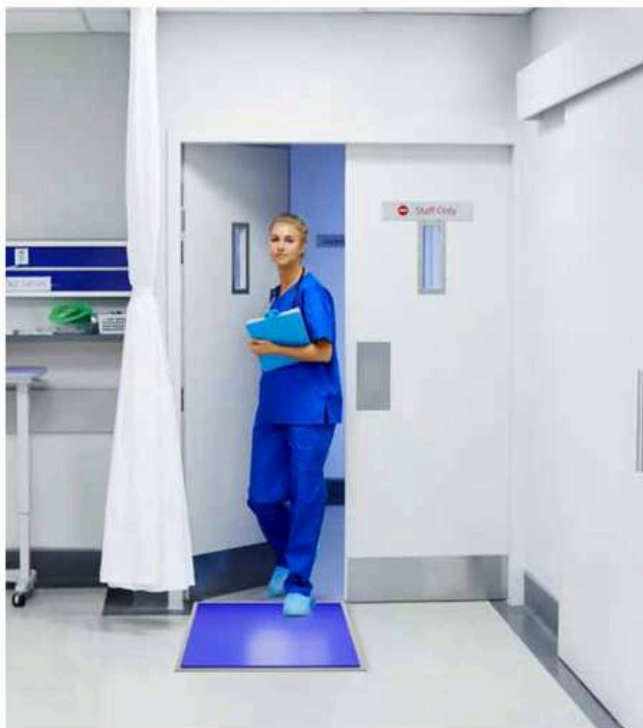

SIZE	PART DESCRIPTION	WHITE	BLUE
0.6 m x 0.76 m	replacement 60 layer pad	WC000003	WC020003
0.8 m x 0.6 m	(includes one 60 layer pad)	WC000011	WC020011
0.8 m x 1.3 m	(includes two 60 layer pads to cover mat area)	WC000022	WC020022



YOUR **MAT** EXPERT

RINGMAT HONEYCOMB


Durable outdoor entrance mat with holes

- The ideal choice for demanding conditions such as icy, snow prone locations. • Raised pattern surface provides increased grip to footwear while scraping away dirt and debris. • Large holes allow dirt and debris to fall through, keeping it trapped.
- Product height: 23 mm

 **Typical Applications**
Children's play areas. Entrance areas, Bars, Ski areas.

Material
Rubber mix, including >50% recycled material.

Resistance to Environment
Suitable for wet and dry environments, indoors or outdoors



SIZE	BLACK
0.4 m 0.6 m (23 mm)	RM010011
0.8 m x 1.2 m (23 mm)	RM010001
1 m x 1.5 m (23 mm)	RM010002

RINGMAT OCTOMAT

Extremely tough rubber matting for outdoor use

- Highly durable entrance mat ideal for use outdoors. • Raised surface design ensures grip in wet conditions while scraping away dirt and debris. • Large holes allow dirt and debris to fall through, keeping it trapped. • Option of brush inserts for enhanced scraping, ideal for more heavy-duty environments where debris is a factor.
- Product height: 17 mm, 22 mm

 **Typical Applications**
Entrance areas, Bars, Ski areas

Material
Rubber mix, including >50% recycled material.

Resistance to Environment
Suitable for indoor and outdoor environments




SIZE	BRUSHES						CONNECTOR	
	BLACK	YELLOW	GREY	GREEN	RED	BLUE	BLACK	BLACK
0.4 m 0.6 m (17 mm)	RM010012	RM070001B	RM060001B	RM040001B	RM030001B	RM020001B	RM010001B	RM010004
0.5 m x 1 m (22 mm)	RM010013							

YOUR **MAT** EXPERT



HYGIWELL

Loose lay disinfectant floor mat, ideal to support COVID-19 protection

- Deep 'well' holds liquid disinfectant for effective cleaning of footwear at entrances.
- Made from 100% recycled REACH-compliant PVC material.
- Specially designed flexible scrapers remove dirt and allow footwear to immerse in disinfectant.
- Suitable for any location where hygiene is important such as farm buildings, abattoirs, and food processing factories.
- 1.75 ltr recommended disinfectant volume.
- We recommend the use of a standard quaternary ammonium compound type virucidal disinfectant.
- 100% recyclable.
- A+ BREEAM rating.
- Ramped edges reduce the risk of tripping.
- Product height: 16 mm

SIZE

0.55 m x 0.8 m

BLACK

HYW010001





Material
100% REACH-compliant recycled PVC

Resistance to Environment
Suitable for indoor and outdoor environments



YOUR **MAT** EXPERT

OCTOROLL

Ultra-tough rubber entrance matting by the metre

- The ideal choice for demanding entrances. • Perfect for outside use - rubber is naturally slip resistant. • Hardwearing and durable.
- Withstands even the most demanding weather conditions with an operating temperature from -20°C to +160°C. • Large holes allow debris to fall through the mat and provides good drainage for rainwater. • The surface pattern scrapes dirt and debris from footwear. • Easy to install. • Product height: 13 mm

SIZE



1 m x per linear metre

BLACK

RM010014C

 **Material**
Rubber mix, including >50% recycled material.

Resistance to Environment
Suitable for wet and dry environments, indoors or outdoors

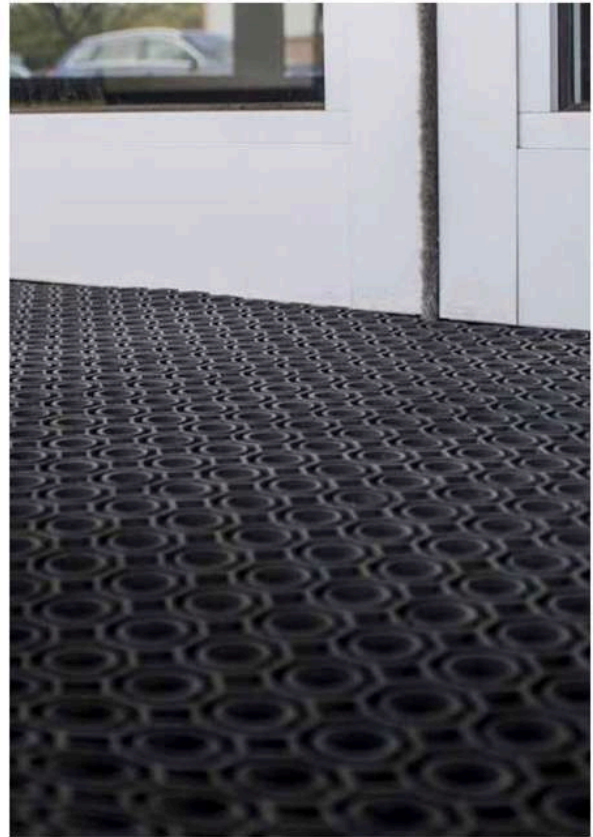

RAMPMAT

A popular honeycomb mat for all environments

- A popular choice of doormat, suitable for most climates. • The raised honeycomb design provides grip while scraping away dirt and moisture. • Moulded bevelled edging for trip-resistance and wheeled access. • Manufactured from durable rubber. • Slip tested to DIN 51130. • Product height: 14 mm

SIZE

0.8 m x 1.2 m

0.9 m x 1.5 m

BLACK


RP010002

RP010001

 **Typical Applications**

Material
Rubber mix, including >50% recycled material.

Resistance to Environment
Suitable for wet and dry environments, indoors or outdoors



YOUR **MAT** EXPERT

FINGERTIP

Natural rubber doormat gives dirt the brush-off

- Flexible rubber nodules deliver excellent dirt scraping and trapping action.
- Dirt is effectively brushed off then retained in a solid base, keeping floors cleaner for longer.
- Suitable for offices and other commercial buildings, especially where mud and debris often end up indoors.
- Suitable for most weather conditions, making it ideal for outdoor use.
- Slip-resistant base, with bevelled edges, to help retain position and reduce tripping hazards.
- Product height: 11 mm-13 mm

SIZE	BLACK
0.6 m x 0.8 m	FT010001
0.8 m x 1 m	FT010002
0.9 m x 1.8 m	FT010003
0.9 m x 1.5 m	FT010006
0.35 m x 0.6 m (10 mm)	FT010007

Material
Natural rubber

Resistance to Environment
Suitable for indoor and outdoor environments



COBASRAPE

Multi-purpose doormat, suitable for outdoor and indoor use


- Multi-purpose doormat that scrapes away dirt and also retains water.
- Raised pattern scrapes away dirt and debris from footwear.
- Non-slip, helping to reduce the risk of slipping on wet floors.
- Holds up to 2.6 litres of water/ m² or 1.5 kg of dry dust/ m².
- Ideal industrial and manufacturing industries, where wet, greasy or oily conditions are present.
- Bevelled edging as a safety standard.
- Suitable for indoor or outdoor use.
- Slip tested to DIN 51130.
- Product height: 6 mm

SIZE	BLACK
0.85 m x 0.75 m	CS010001
0.85 m x 1.5 m	CS010002
0.85 m x 3 m	CS010003
1.15 m x 1.75 m	CS010004

Typical Applications
Food manufacturing, Kitchens, General industrial. Entrance areas.

Material
NBR

Resistance to Environment
Suitable for wet and dry environments, indoors or outdoors



YOUR **MAT** EXPERT

Anti- fatigue Tapis



Description

- Anti-fatigue mat for standing workstations behind counters and other static workstations.
- Exceptional comfort all day long thanks to its texture.

Characteristics

Material	Colour	Total thickness
Surface vinyle sur mousse 100 % nit	gris marbré	12.7 mm
Dimensions	Weight per unit	Customs code
61 x 91 mm	3.52 kg	3918900090
EAN code		
3486010082224		


Use

- To be installed in a dry environment.
- Non-slip, abrasion-resistant surface.
- The edges are bevelled to reduce the risk of falls.
- The anti-slip strip is to be ordered separately.

Material

- REACH (EC)1907-2006 compliant.

YOUR **MAT** EXPERT

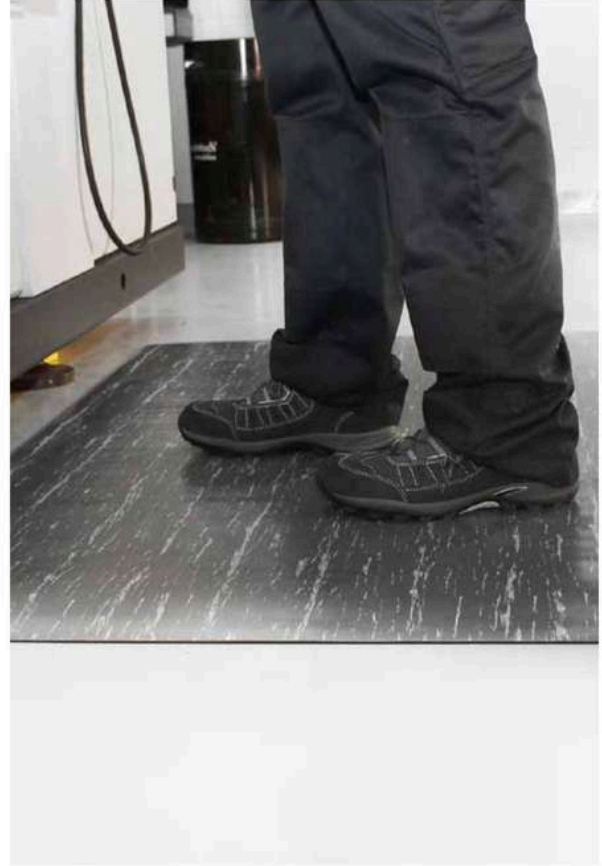

MARBLE ANTI-FATIGUE

Anti-fatigue matting when appearance is important

- Marble design helps blend in to an array of interior styles.
- Ideal for locations where looks matter such as hair salons, beauty counters or retail.
- Plush foam backing offers relief from standing all day.
- Hardwearing top surface ensures long life with normal use.
- Capable of withstanding industrial applications.
- Bevelled edges help avoid creating a trip risk.
- Product height: 12.5 mm

SIZE

0.6 m x 0.9 m
0.9 m x 1.5 m
0.9 m x 18.3 m
0.9 m x 3 m
0.9 m x per linear metre

BLACK

MT010001
MT010002
MT010003
MT010004
MT010003C



Typical Applications


General industrial, Retail, Hairdressers

Material


Vinyl top surface with PVC foam backing (glued)

Resistance to Environment

Suitable for dry indoor environments



YOUR **MAT** EXPERT

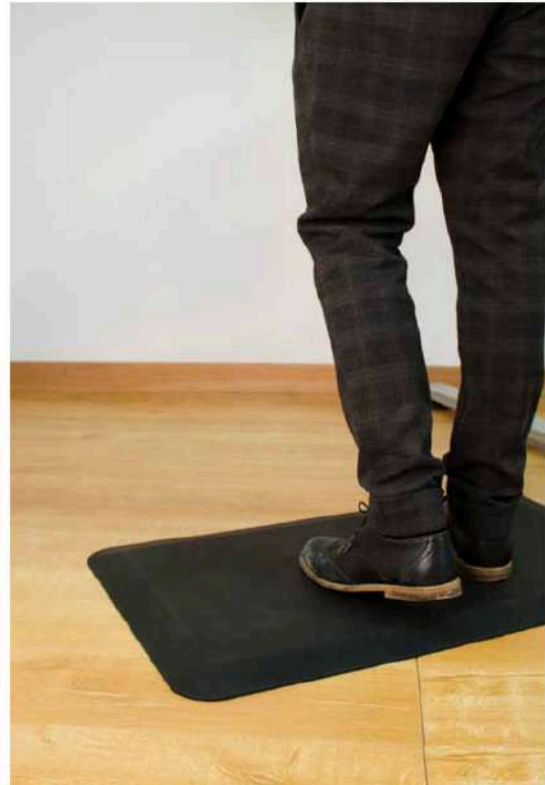

ORTHOMAT® OFFICE

The anti-fatigue mat for office workers

- Improves overall posture and wellbeing when standing in static positions.
- Provides just the right balance between cushioning and foot support for users of sit/standing desks.
- Helps to delay the onset of pain and tiredness otherwise experienced from standing on hard or firm floor surfaces.
- Textured underside keeps this anti-fatigue mat in place.
- Gentle bevelled edges to reduce trip hazards, while creating a neat 'anti-curl' finish that sits flush to the floor.
- Highly durable, can withstand a wide range of footwear.
- Handy size for ease of handling making lifting and moving an effortless task.
- Fits into most office workstations.
- Product height: 16 mm



Resistance to Environment
Suitable for indoor environments only

Material
PU

SIZE

0.5 m x 0.8 m

BLACK

OO010001

